



A NEW STANDARD IN FIELD STRENGTH METERS

TV, CABLE, SATELLITE & WIFI ANALYSER

RANGER*Neo* 2



EASY OPERATION

*Hybrid user interface
(touch + keyboard)*



HEVC H.265

*High Efficiency Video
Codec*



WIFI ANALYSER

*Dual display:
SPECTRUM and DATA*



WIDEBAND LNB

*The entire SAT band
on a single SPAN*

The future today

HEVC H.265 DECODING

High Efficiency Video Codec

RANGER Neo 2 is the new industry-standard in field strength meters and TV analysers. It is capable to offer HEVC signal demodulation compatible with the new DVB-T2 broadcast signals.



LIGHT WEIGHT

2.3 KG



**TRIPLE SPLIT
DISPLAY**




**ULTRA FAST
SPECTRUM**



**FREE FIRMWARE
UPDATES**

Field strength meter for the HDTV era

wbLNB COMPATIBLE

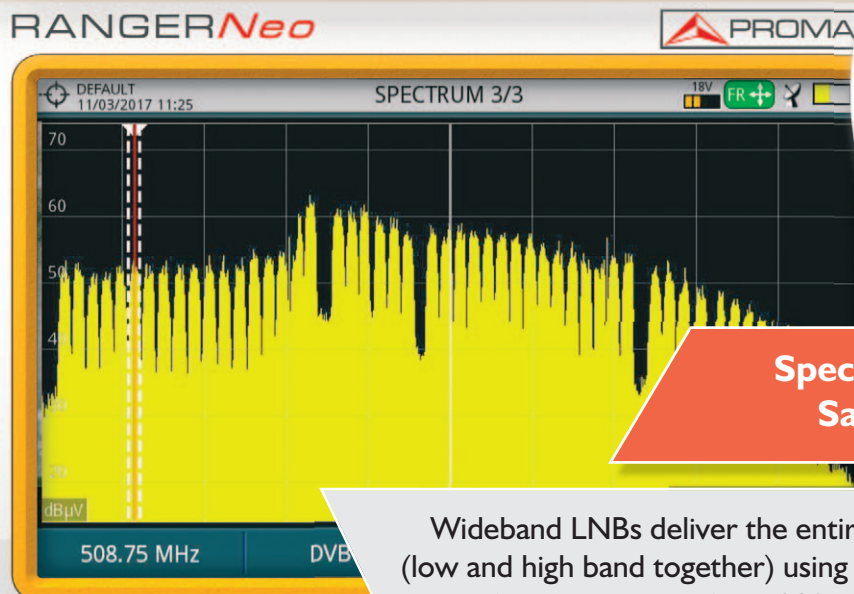

Spectrum analyser from 5 to 2500 MHz
Satellite band from 250 to 2350 MHz


Wideband LNBs deliver the entire Vertical and Horizontal satellite polarities (low and high band together) using two separate RF cables and an extended IF frequency range from 290 to 2,340 MHz. **Is your analyser prepared?**

DCSS LNBs

Digital Channel Stacking Switch satellite LNB

Digital Channel Stacking Switch LNB can support several users on a single cable distribution system by allocating specific user bands for each of them. It is not possible to work with this type of LNB unless your field strength meter can communicate using EN50494 and EN50607 standard protocols.

This is the case of **RANGER Neo 2** which also covers JESS and SATCR.

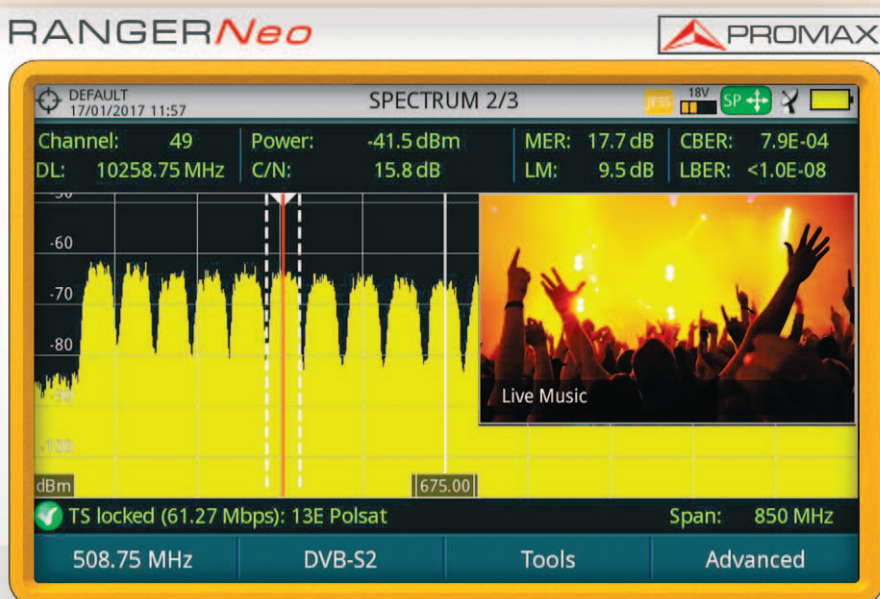

Be ready for the future


2.4 GHz WiFi ANALYSER

Improve your network performance



Your analyser for the new world


2.4 GHz WiFi ANALYSER Improve your network performance

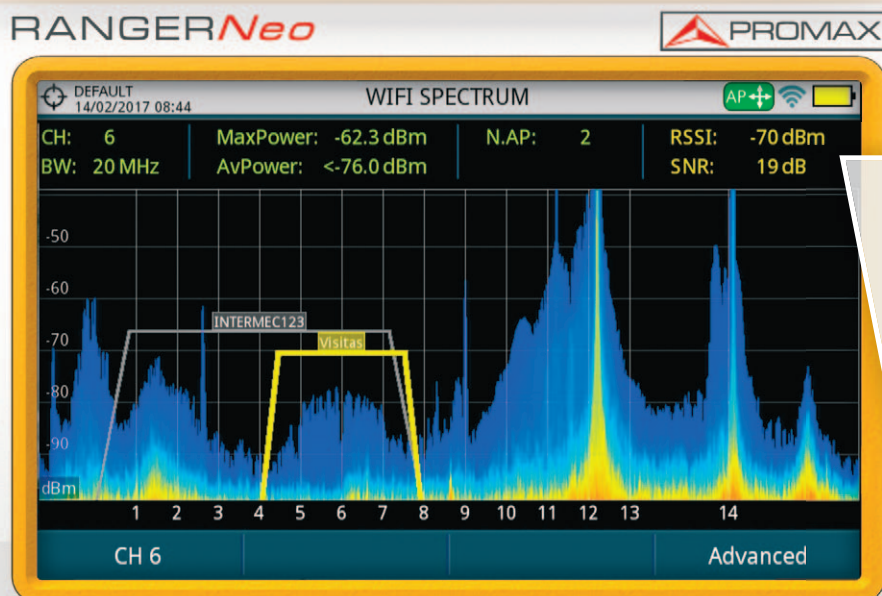


Simultaneous real spectrum analyser information + WiFi access point data

WiFi signals can be disturbed by interference from other WIFI stations, for example other access points, but also from non-WIFI signals such as wireless CCTV cameras or, like in the picture, a microwave oven! **RANGER Neo 2** can display both simultaneously.


RANGER Neo 2 shows convenient information from the access points such as SSID, RSSI, SNR, security information, etc. It also indicates the number of access points per channel.

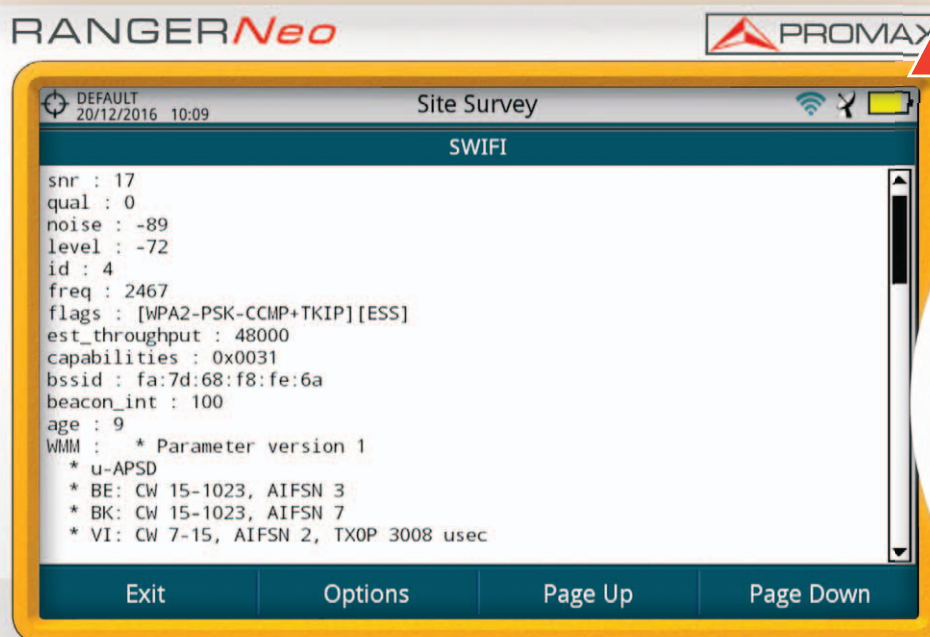

DRIVE TEST GPS - OPTION

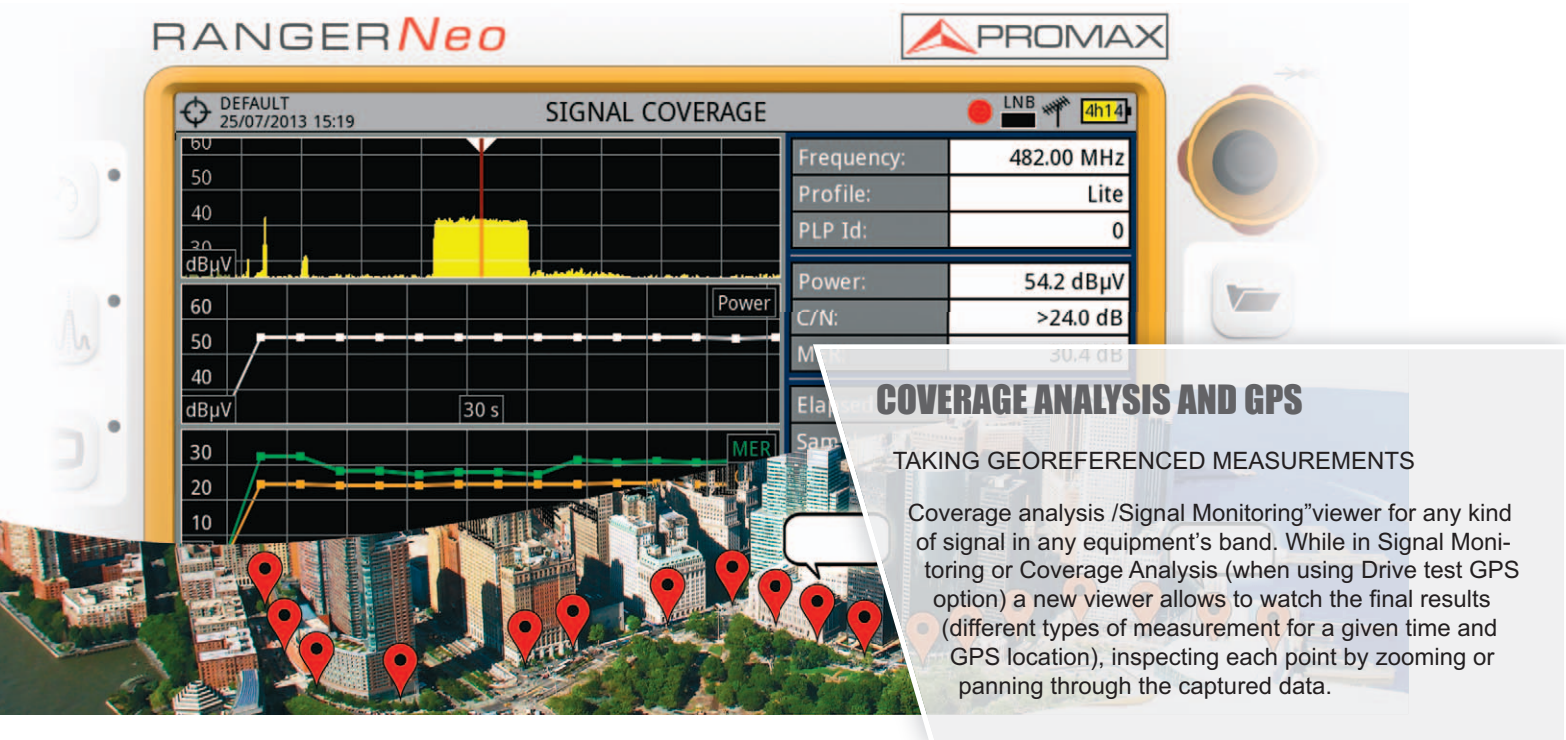


CONSTELLATION DIAGRAM

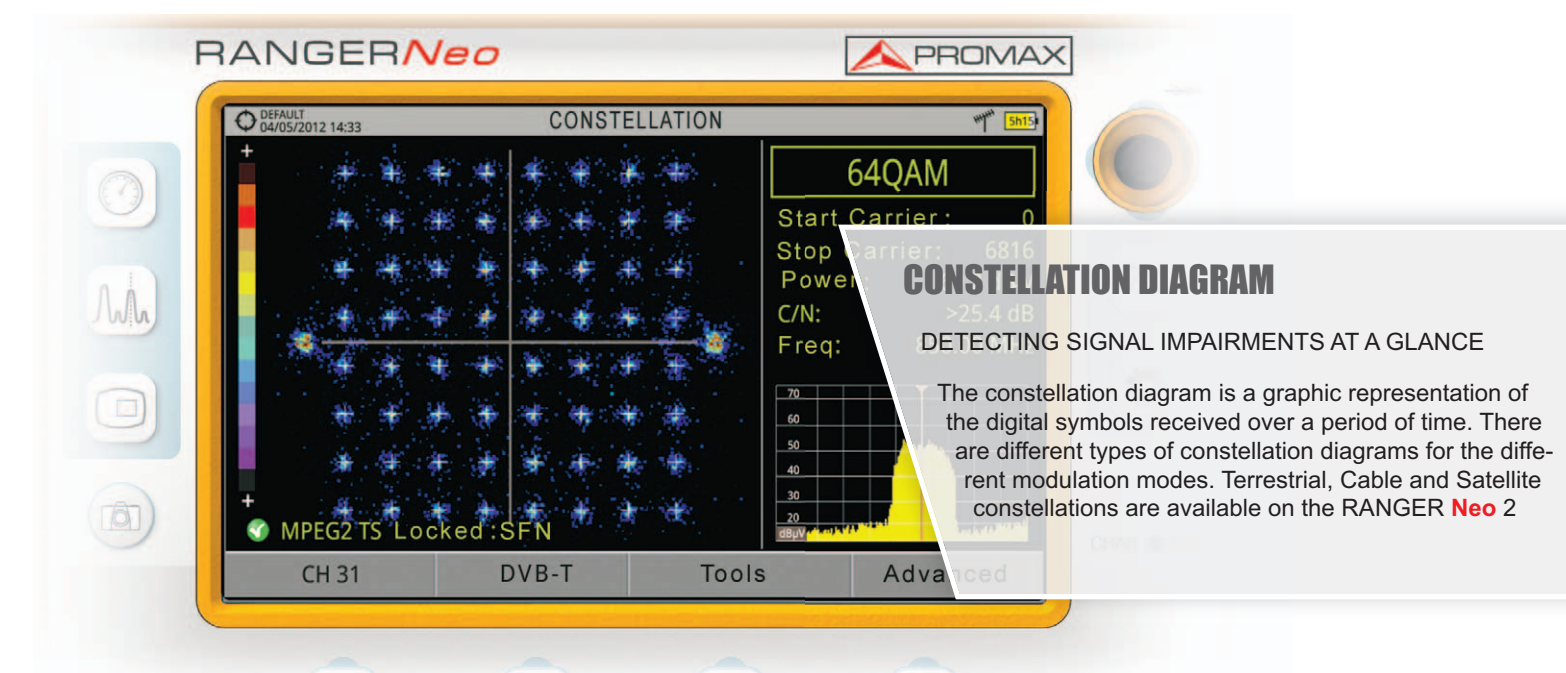


Fast and accurate spectrum analyser

PROFESSIONAL SPECTRUM ANALYSER

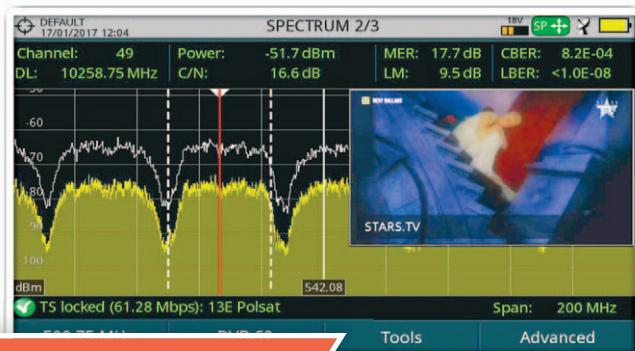


Reference traces

Freeze the spectrum graph and compare it with the running trace.

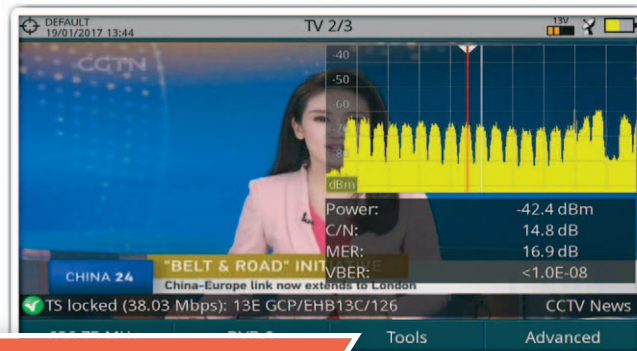


Triple split display

Say goodbye to switching between TV, measurements and spectrum modes.

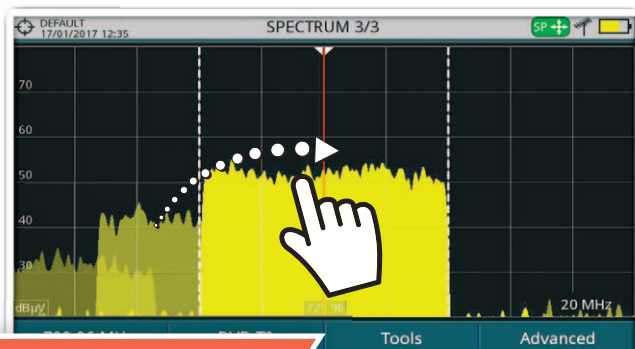


Touch screen

Place the marker on any channel and move the trace using your finger.

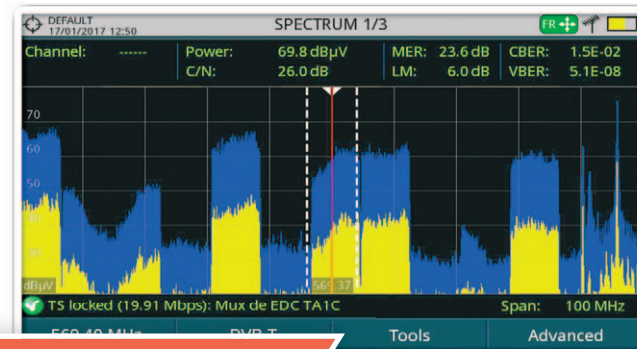

MIN and MAX hold

Display them separately or simultaneously along with the current spectrum trace.

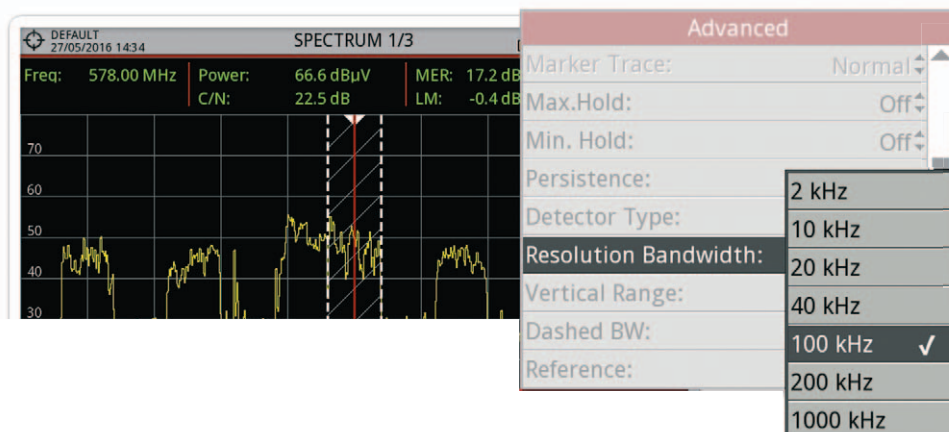


High resolution filters

Having the proper resolution filters is critical in some applications. RANGER *Neo* 2 includes a very narrow 2 kHz filter.

Enjoy a wide variety of functions

EXTENDED IP FUNCTIONS the future of content delivering

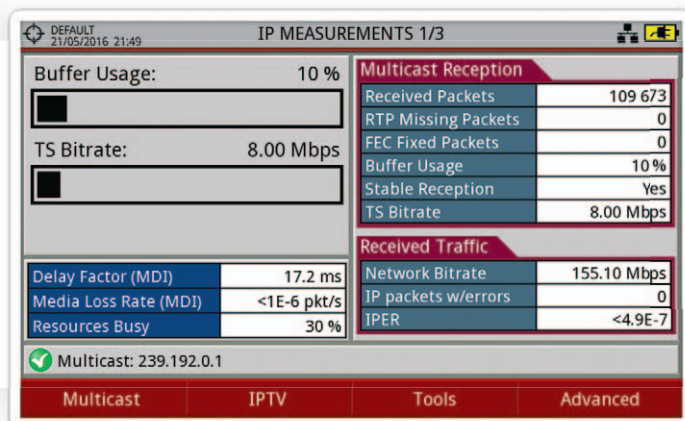

Network bitrate



The network bitrate gives you an indication of the network load and possibility of overload.

Media Delivery Index

A key quality measurement formed by the Delay Factor and the Media Loss Rate.

PING, Trace, Average packet delay and IPDV

They are very useful to identify the reasons for communication problems, anything from complete service interruptions to uncontrolled delays which can be as important in terms of service performance.

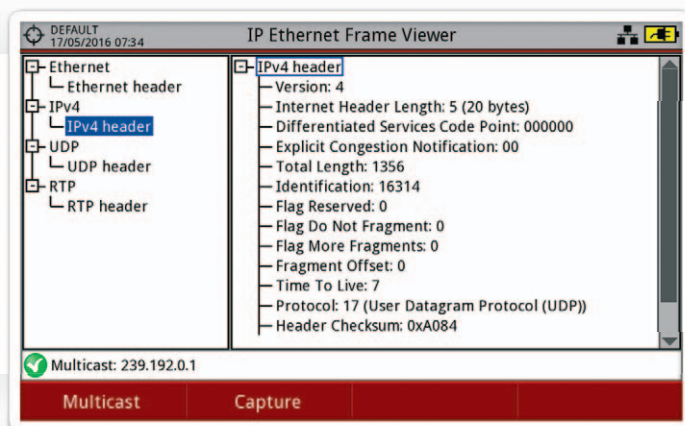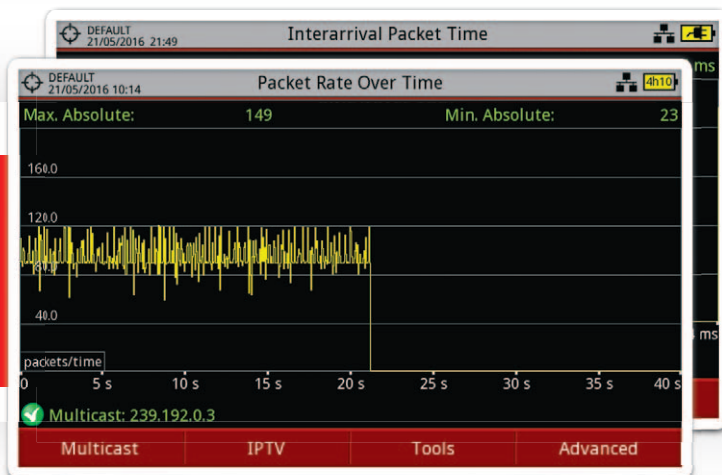


IP Ethernet frame viewer

IP Ethernet frame viewer captures a multicast packet displaying all its frame details, for example Time-To-Live (TTL), all fields of RTP protocol, etc... It is very helpful to study IPTV signalisation problems.

Enjoy a wide variety of functions


ETHERNET CONNECTIVITY

remote control and web server

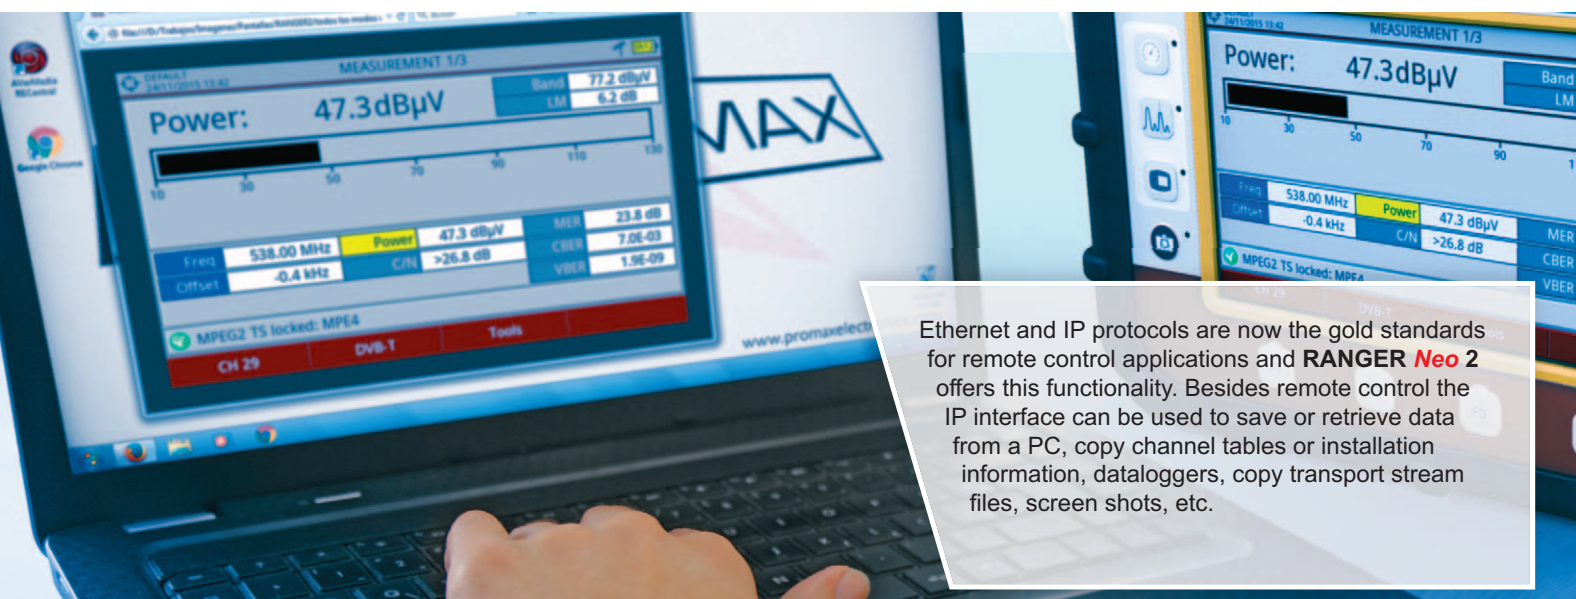


MORE INTERNAL MEMORY

up 7 GB for user data

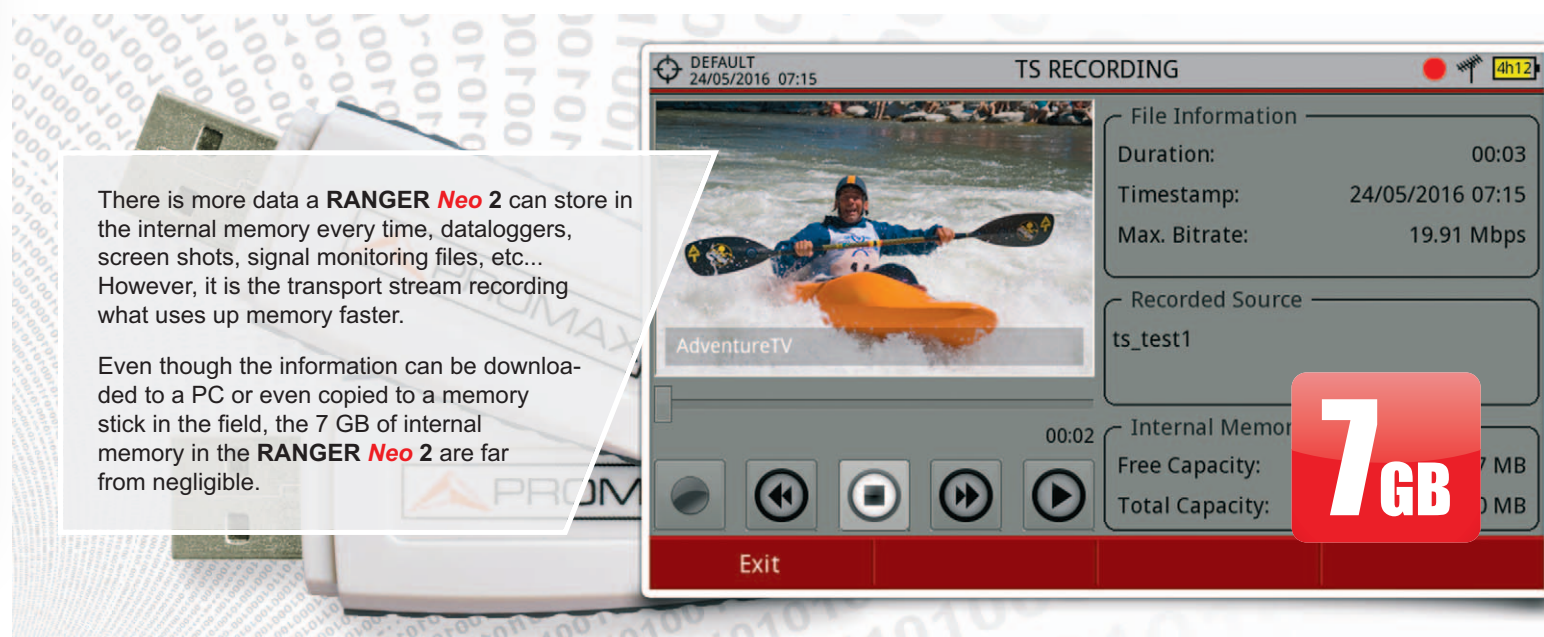


Enjoy a wide variety of functions

MANY USEFUL FUNCTIONS

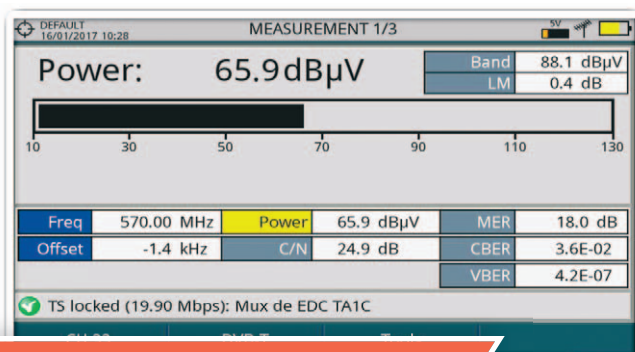


Simultaneous measurements

More computing power for real-time measurements displayed on a single screen.

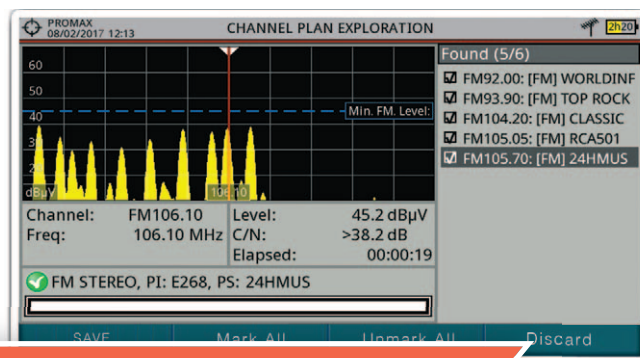


FM RADIO RECEIVER & ANALYZER

FM radio signals can be scanned, measured and demodulated

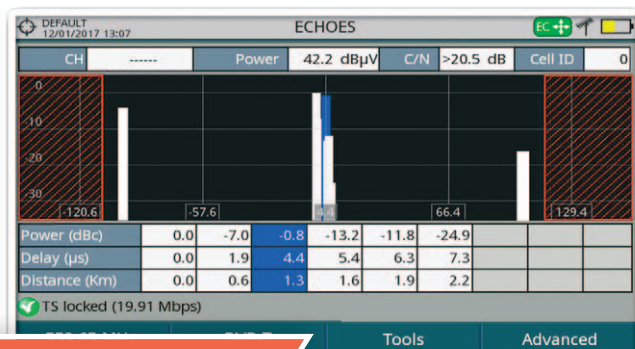


Dynamic echoes

A must-have utility for testing DVB-T, DVB-T2 and DVB-C2 networks.

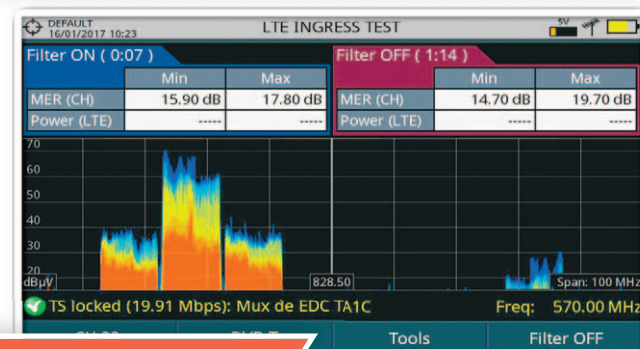


LTE ingress test

Should you install an LTE filter? Test your TV distribution system.

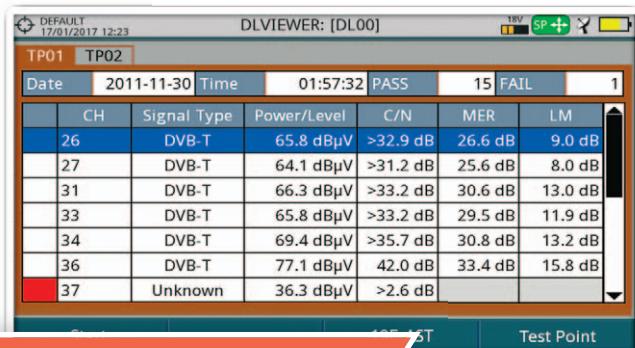

Datalogger and Test&Go

Collect data for your reports faster and easier using the auto-setup Test&Go.

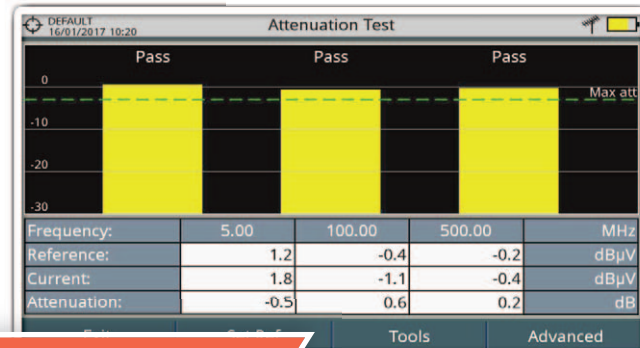

Attenuation test

Test the frequency response of your installation using RP-050, RP-080, RP-110B signal generators.

A new breed of analysers for a new world

TRANSPORT STREAM ANALYZER



Transport stream recording and analysis



Home network, commercial, point to point



Extended IPTV functions



H.265 HEVC analyser and decoder



Fast-storage 7 GB capacity for user data



5 GHz RF input (optional)



Webserver control via Ethernet port



Common Interface slot for encrypted channels



2x USB ports



DAB and DAB+ digital radio (optional)



Digital Channel Stacking Switch LNB (dCSS)



Optical power meter and RF converter (optional)



GPS for signal coverage analysis (optional)



A NEW STANDARD IN FIELD STRENGTH METERS

TV, CABLE, SATELLITE & WIFI ANALYSER

SPECIFICATIONS	RANGER <i>Neo 2</i>		
DIGITAL STANDARDS	DVB-T, DVB-T2, DVB-T2 lite, DVB-T2-MI (Gateway to Modulator), TS DVB-C, DVB-C2 DVB-S, DVB-S2, DVB-S2 Multistream, DSS, ACM / VCM		
AUDIO CODECS	MPEG-1, MPEG-2, HE-AAC, Dolby Digital, Dolby Digital Plus		
VIDEO CODECS	MPEG-2, MPEG-4 / H.264, HEVC / H.265		
INPUTS AND OUTPUTS	Universal RF connector 75 Ω ASI-TS input and output (BNC Female, 75 Ω) IPTV Input for Measurements and Decoding, UDP / RTP, RJ45 Ethernet 10 / 100 / 1000 Mbps HDMI output IP input for remote control Analogue Video/Audio input Common Interface module for slot for CA-modules 2 USB connectors for data transferring and GPS module (Type A)		
FUNCTIONS	Merogram and Spectrogram Constellation diagram for all DVB standards LTE Dynamic echoes analysis StealthID (instant identification of tuning parameters) PLS (Physical Layer Scrambling) Ultra fast spectrum analyser (70 ms sweeping time) with max. and min. hold FM RDS radio measurements and decoding Screenshots and Datalogger for measurement reports	Wideband LNB WiFi 2.4 GHz LTE 1.8 GHz OTT Service Recording DVB-S2 multistream Signal monitoring Field strength Meas. Task planner TS Recording	TS Analysis Resolution Bandwidth: 2, 10, 20, 40, 100, 200 kHz, 1 MHz Web server MER by Carrier IPTV Multicast Shoulder Attenuation GPS Coverage Analysis (option) Beacon-Flyaways SNG & VSAT
MEASUREMENT MODE Frequency Margin DVB-T COFDM DVB-T2 Base and Lite COFDM DVB-C QAM DVB-C2 COFDM PAL, SECAM and NTSC analogue TV FM radio DVB-S QPSK DVB-S2 QPSK, 8PSK, 16APSK, 32APSK DSS QPSK	From 5 - 1000 MHz (Terrestrial) From 250 - 2350 MHz (Satellite) Power (35 to 115 dB μ V), CBER, VBER, MER, C/N, Link margin. Power (35 to 115 dB μ V), CBER, C/N, LBER, MER, Link Margin, BCH ESR, LDP iterations, wrong packets Power (45 to 115 dB μ V), BER, MER, C/N and Link margin Power (45 to 115 dB μ V), CBER, MER, C/N, LBER, BCH ESR, LDP iterations and wrong packets M, N, B, G, I, D, K and L Level measurement Power (35 to 115 dB μ V), CBER, MER, C/N and Link Margin Power (35 to 115 dB μ V), CBER, LBER, MER, C/N, BCH ESR, wrong packets and Link Margin Power (35 to 115 dB μ V), CBER, VBER, MER, C/N and Noise margin		
SPECTRUM ANALYZER Frequency Margin Measurement range Span	From 5 - 1000 MHz (Terrestrial) From 250 - 2500 MHz (Satellite) From 10 - 130 dB μ V Full / 500 / 200 / 100 / 50 / 20 / 10 MHz		
OPTIONS OP-002-PS OP-002-WL OP-002-DAB+ OP-002-GPS OP-002-19	OPM & OPT to RF conv & WiFi 5 GHz & LTE 2.6 GHz WiFi 5 GHz & LTE 2.6 GHz DAB, DAB+ GPS Coverage Analysis For rack assembly		
TS-Analysis	Real-time Transport Stream analyser with TS tables display, bitrate analysis & TR 101290 alarms monitoring		
INTERNAL STORAGE	7 GB for measurement protocols, screenshots and transport stream recordings		
PC CONNECTION (via ethernet interface)	NetUpdate 4 (free software); Free and automatic firmware updates; Remote control (webserver); User customised channel plans; Measurement reports and screenshot;		
GENERAL	Hybrid operation: Touch screen (7") or conventional keyboard Battery >4 h. in continuous mode DiSEqC 1.2 SATCR / SCD (EN50494) DCSS / SCD2 (EN50607)		

A new breed of analyzers for a new world



RANGER Neo 4 RANGER Neo 3 RANGER Neo 2 RANGER Neo + RANGER Neo Lite HD RANGER UltraLite HD RANGER Eco

- ✓ Included
● Optional

- ALL VERSIONS
■ DVB MODELS ONLY
■ ISDB-T MODELS ONLY
■ ATSC MODELS ONLY

4K decoder	✓						
HEVC H.265 decod. + 4K Frame Grabber	✓	✓	✓	✓	✓		
MPEG-2 and MPEG-4 H.264 decoder	✓	✓	✓	✓	✓	✓	✓
Touch screen	✓	✓	✓	✓	✓		
Wide band LNB Compatibility (wbLNB)	✓	✓	✓	✓	✓		
2.4 GHz Wi-Fi analyzer	✓	✓	✓	✓	✓		
1.8 GHz LTE	✓	✓	✓	✓	✓		
OTT	✓	✓	✓	✓	✓		
Service recording	✓	✓	✓	✓	✓	✓	
HDMI output	✓	✓	✓	✓	✓		
Video/Audio input	✓	✓	✓	✓	✓	✓	✓
USB interface	2x Type A	2x Type A	2x Type A	2x Type A	2x Type A	1x Mini USB	1x Mini USB
Battery time	> 4 hours	> 4 hours	> 4 hours	> 4 hours	> 2 hours	> 2 hours	> 2 hours
Resolution filter 100 kHz	✓	✓	✓	✓	✓	✓	✓
Resolution filters 200 kHz, 1 MHz	✓	✓	✓	✓		✓	
Resolution filters 2, 10, 20, 30, 40 kHz	✓	✓	✓				
Echoes analysis	✓	✓	✓	✓	✓	✓	✓
Constellation diagram	✓	✓	✓	✓	✓	✓	✓
Web server and Video/Audio Streaming	✓	✓	✓	✓			
Spectrogram and Merogram	✓	✓	✓	✓			
MER by carrier	✓	✓	✓	✓			
SCAN + TILT	✓	✓	✓	✓			
IPTV analyzer	✓	✓	✓				
TS-ASI input and output	✓	✓	✓				
TS analysis and recording	✓	✓	✓				
Common Interface (encrypted channels)	✓	✓	✓				
Shoulder attenuation measurement	✓	✓	✓				
T2-MI	✓	✓					
Network delay Margin	✓	✓					
GPS for drive test	✓	✓	●	●			
DAB/DAB+ digital radio	✓	✓	●	●			
5 GHz WiFi + 2.6 GHz LTE + 6 GHz RF in	●	●	●	●			
Optical measurements							
and optical to RF converter	●	●	●	●			
ATSC standard			✓	✓	✓		
ISDB-T standard			✓	✓	✓		
DVB-T/T2 standard	✓	✓	✓	✓	✓	✓	✓
DVB-S/S2, DSS and ACM/VCM standards	✓	✓	✓	✓	✓	✓	✓
DVB-C standard	✓	✓	✓	✓	✓	✓	✓
DVB-C2 standard	✓	✓	✓	✓	✓	✓	✓
QAM annex B standard			✓	✓	✓		
PSIP analysis			✓				
Closed Caption			✓				