




Unicable II 2-way combiner, 5-2400MHz

Model: IDLU-UCM101-00020-OPP

Item: 5381

Technical Specifications

Frequency Range	5 - 2400MHz
Inputs	2x F-Type, female
Output	1x F-Type, female
Insertion Loss	4dB max.
Isolation between ports:	8dB
5-47MHz	16dB min.
47-2400MHz	-10dB max.
Input Return Loss	-8dB max.
Output Return loss	Yes
DC & 22kHz pass from Output to Input	75Ω
Impedance	-30 ~ +60°C
Working Temperature	40g
Weight	48.5x34.9x14.2mm
Dimensions	

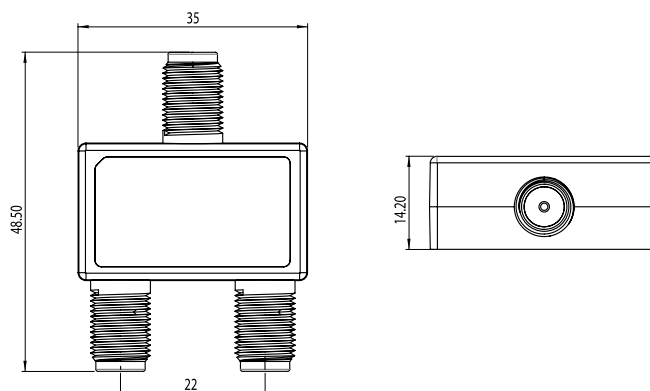

For purpose of brevity, some product descriptions in this sheet remain at platform level and may not be referred to as detailed datasheets of the products. Inverto Digital Labs reserves the right to amend, omit or add products, product-lines, and / or features without notice. As product specifications may change without notice, always contact Inverto to obtain the latest product specification sheets.

For further details contact: sales@inverto.tv

FTA Communication Technologies S.a r.l Tel. +352 264 367 1 Fax. +352 264 313 68



www.inverto.tv